

INTRODUCING PromptXpress


With self contained Wi-Fi
for quick and easy on-location prompting.

LISTECTM
teleprompters

The PromptXpress Series



PX-1500 Series
PromptXpress
15-inch Wireless
LED Display System
with side panels.

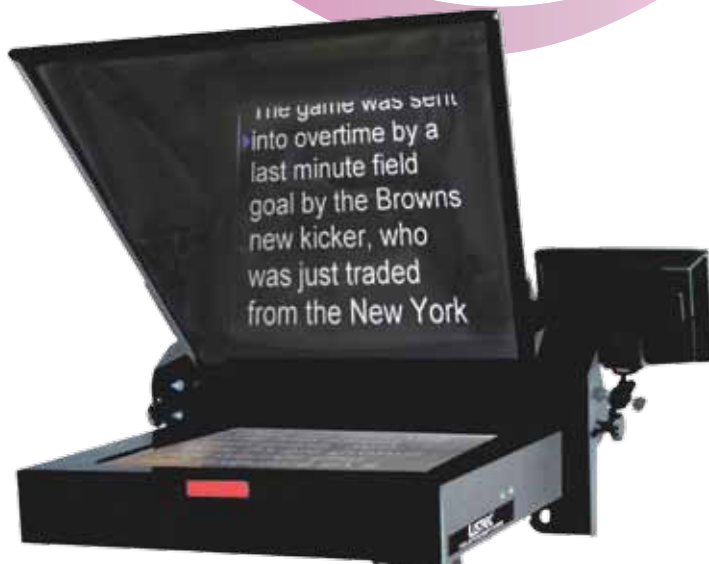

PromptXpress
with Optional 7-inch touch screen
display, without side panels.

The New **PromptXpress** Series incorporates a built-in Wi-Fi Windows-based computer and features a high quality Enhanced Brightness 15-inch LED display with touch screen and Listec's unique internal SensaTally. Configured with a trapezoidal fold-down Mirror/Soft Hood to accommodate wide-angle shots, the system boasts a Sliding Balance Plate Assembly for quick setup and Camera Riser featuring adjustable height settings and sliding top platform to optimize camera positioning. A sliding rear Counterbalance maintains neutral balance on the pan head. Optional battery plates for Anton/Bauer and IDX are available, as is a pan bar mounted multi-functional touch-screen display for editing, intercom, preview and other tasks.

PromptXpress supports the Clear-Com Concert, IntraCom Systems VCom and other software-based intercom systems for multi-user conferencing. This feature permits constant communication between the mobile OB unit and broadcast facility; IFB is also supported. On the Concert and VCom systems, a virtual intercom station can be displayed on a separate touch-screen through the prompter's Wi-Fi capability.

TELEPROMPTER features:

- 15" Enhanced LED at 1500 nits
- Internal SensaTally with brightness control
- Wide-angle Fold-down Mirror with removable Sunshades
- Easy-mount Support System with Adjustable Camera Riser and Counterbalance
- AC and DC battery power
- Analog and Digital In/Out
- Audio out supports Mini Jack or USB - Includes provision for XLR intercom headset

COMPUTER features:

- Windows 7 (XP Optional)
- Wi-Fi, A B G & N supported
- Bluetooth optional
- VGA out to support optional 7" or 10.2" Touchscreen LCD for editing and display of virtual intercom panel
- 5X USB 2.0 ports

SPECIFICATIONS: PromptXpress PX-1500



INPUTS/OUTPUTS:

2X Looping BNC I/O Composite
with 75-Ohm termination switch
2X Looping SDI I/O
VGA I/O 15-Pin D-type connector
5 Pin XLR to support intercom headset

PANEL:

Touchscreen

Brightness: 1500 nits (cd/m²)
Contrast: 700:1
TV Standard: NTSC/PAL/SECAM
Power connector: 4-pin XLR Male
Power: 110-240VAC 50-60Hz by means
of external 12VDC adapter, ±10%
Battery: 9-18VDC at 67.25W

COMPUTER SPECIFICATIONS:

Windows 7 on-board
RAM: 2GB
Storage: SATA II 30GB SSD
USB 2.0 ports: 4X
Ethernet port: 1X
Security: WPA/WPA2
802.11 A/B/G/N Dual Band Wi-Fi

SUGGESTED COMPUTER OPTIONS:

Teleprompting Software (Listec™ A-6000WIN)
InstantEdit Program with Live Message Crawl)
MS Word
Wireless Mini Keyboard
Wireless Mouse
External USB Hard Drive
External USB CD-ROM
USB System Backup Key
External 7" or 10.2" Touchscreen Display



XP-Keyboard
Bluetooth folding QWERTY
keyboard with case.



A-1649A
Wireless hand held speed control.

INTRODUCTORY MODEL:

PX-1500PE - 15-inch LED Enhanced

- Brightness 1500 nits
- Teleprompter weight, excluding counterbalance:
26 lb / 11.8kg
- Touchscreen for easy setup

FUTURE MODELS:

PX-1700PE - 17-inch Enhanced LED Display

- Brightness: 1400 nits
- Contrast: 1000:1

PX-1900PE - 19-inch Enhanced LED Display



Coming Soon
Listec Teleprompters
CinePrompt
version of the
PromptXpress.

All Listec™ Teleprompter products are manufactured/assembled in the USA.
www.listec.com / sales@listec.com

TIFFEN The Tiffen Company - 90 Oser Avenue, Hauppauge, NY 11788 • 1-800-645-2522 • 631-273-2500 • tiffen.com

All Registered Trademarks are the property of their respective owners. Specifications and availability subject to change without notice

04-2012